

LED TAPE LIGHT 2016 HIGH DENSITY SERIES





Super bright 2016 LEDs
Grade A Epistar brand LEDs
Cuttable every 3 LEDs (12V) or every 6 LEDs (24V)
5-6 Lumens per LED
IP33, IP65, IP67 and IP68 available
3M double sided tape for easy installation
Good heat dissipation, ensures the longevity of the LED chips
5 year warranty

Part No.	LEDs/m	Operating Voltage (V)	Wattage (W/ft)	Efficacy Range(lm/W)	Viewing Angle	Luminous Flu (lm/ft)		CRI*	Cutting Interval (inches)
						min	max		
F2016-12Vxx	240	12V DC	4.4W	88 - 102	120°	390	450	≥80	0.5"
F2016-24Vxx	240	24V DC	4.4W	88 - 102	120°	390	450	≥80	1"

*CRI 90 available upon request

Part No.	Width x Height (IP33)	Width x Height (IP65)	Width x Height (IP67)	Width x Height (IP68)
F2016	10mm x 2.5mm [0.39" x 0.10"]	10mm x 3.5mm [0.39" x 0.14"]	12.3mm x 4.5mm [0.48" x 0.18"]	12.7mm x 4.7mm [0.50" x 0.19"]

Dimensions Units: mm [in]

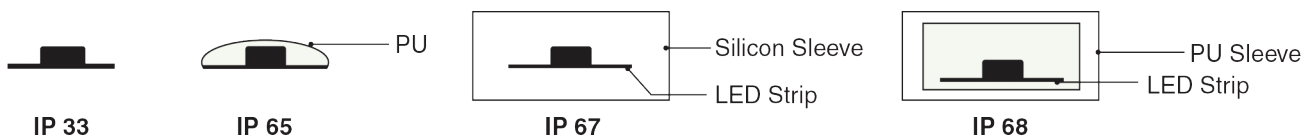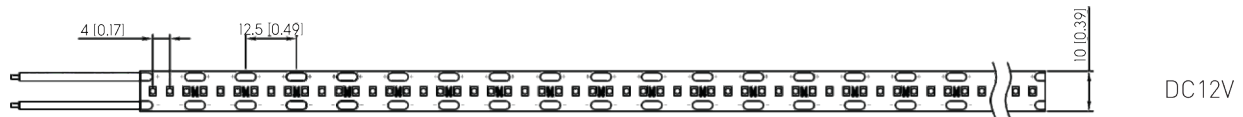

Part Number:

F 2016 -

-

-

Voltage
12V DC
24V DC

Colour
25 = 2500k
30 = 3000k
35 = 3500k
40 = 4000k
45 = 4500k
50 = 5000k

IP Rating
33 = Indoor/dry
location
65 = Wet location
(gel coating)
67 = Submerged
(plastic sleeving)
68 = Submerged
(gel filled sleeving)