

LED TAPE LIGHT

2835 LONG RUN SERIES




- Max run up to 110ft
- Constant current regulated for minimal voltage drop
- Grade A Epistar brand LEDs
- Flexible and cuttable
- Good heat dissipation, ensures the longevity of the LED chips
- Can be cut every 6 LEDs (24V) or every 10 LEDs (36V)
- 24V or 36V DC input
- 5 year warranty

Part No.	LEDs/m	Operating Voltage (V)	Wattage (W/ft)	Efficacy Range (lm/W)	Viewing Angle	Luminous Flux (lm/ft)		CRI*	Cutting Interval (inches)
						min	max		
FXLR60-24Vxx	60	24V DC	0.73W	75-88	120°	55	64	≥80	4"
FXLR80-36Vxx	80	36V DC	1.59W	91 - 101	120°	145	161	≥80	5"


*CRI 90 available upon request

Dimensions Units: mm [in]

FXLR60-24V

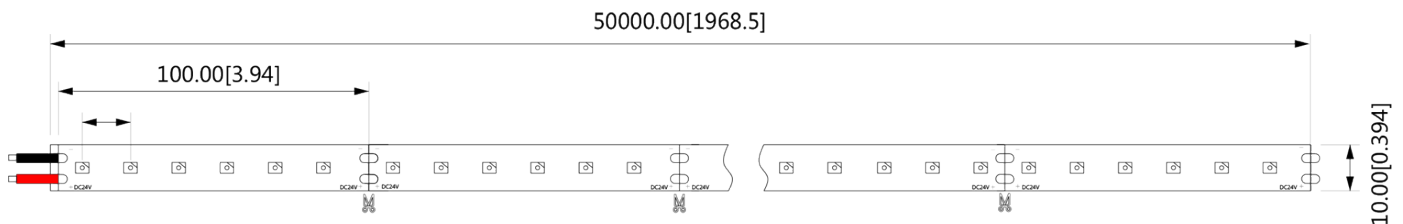


FXLR80-36V

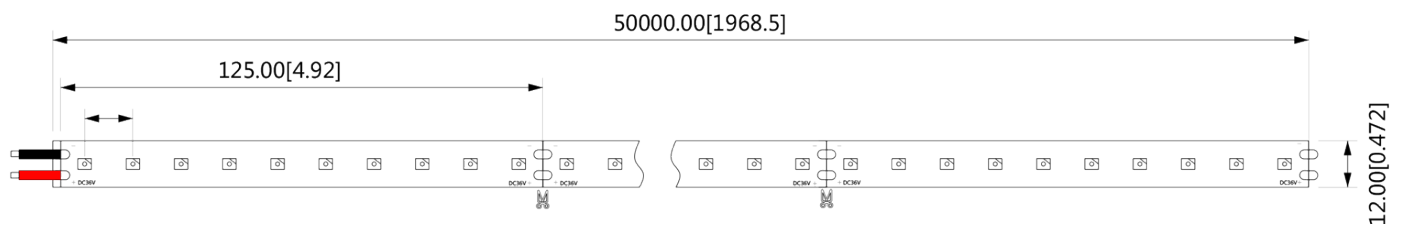

Part No.	Width x Height (IP33)	Width x Height (IP65)	Width x Height (IP67)	Width x Height (IP68)
FXLR60	10mm x 2.5mm [0.39" x 0.10"]	10mm x 3.7mm [0.39" x 0.15"]	12.3mm x 4.5mm [0.48" x 0.18"]	12.7mm x 4.7mm [0.50" x 0.19"]
FXLR80	12mm x 2.5mm [0.48" x 0.10"]	12mm x 3.7mm [0.48" x 0.15"]	13mm x 4.5mm [0.51" x 0.18"]	14mm x 4.7mm [0.55" x 0.19"]

*The maximum available length for IP65 is 50ft. For lengths longer than 50ft, only IP33, IP67 and IP68 is available

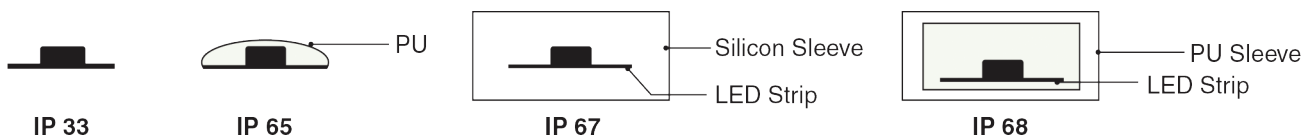

Part Number:

